



**THE BEST
SECURITY SOLUTION**





มั่นใจเลือกใช้สินค้าและบริการจาก HIP

ระยะการอ่านบัตร 50 - 80cm เมื่อใช้กับบัตร LONGER ID 1.8 mm
ระบบเชื่อมต่อ Wiegand 26/34bits/ABA/RS232/RS485



HIP-CMXF100


Longer Reader

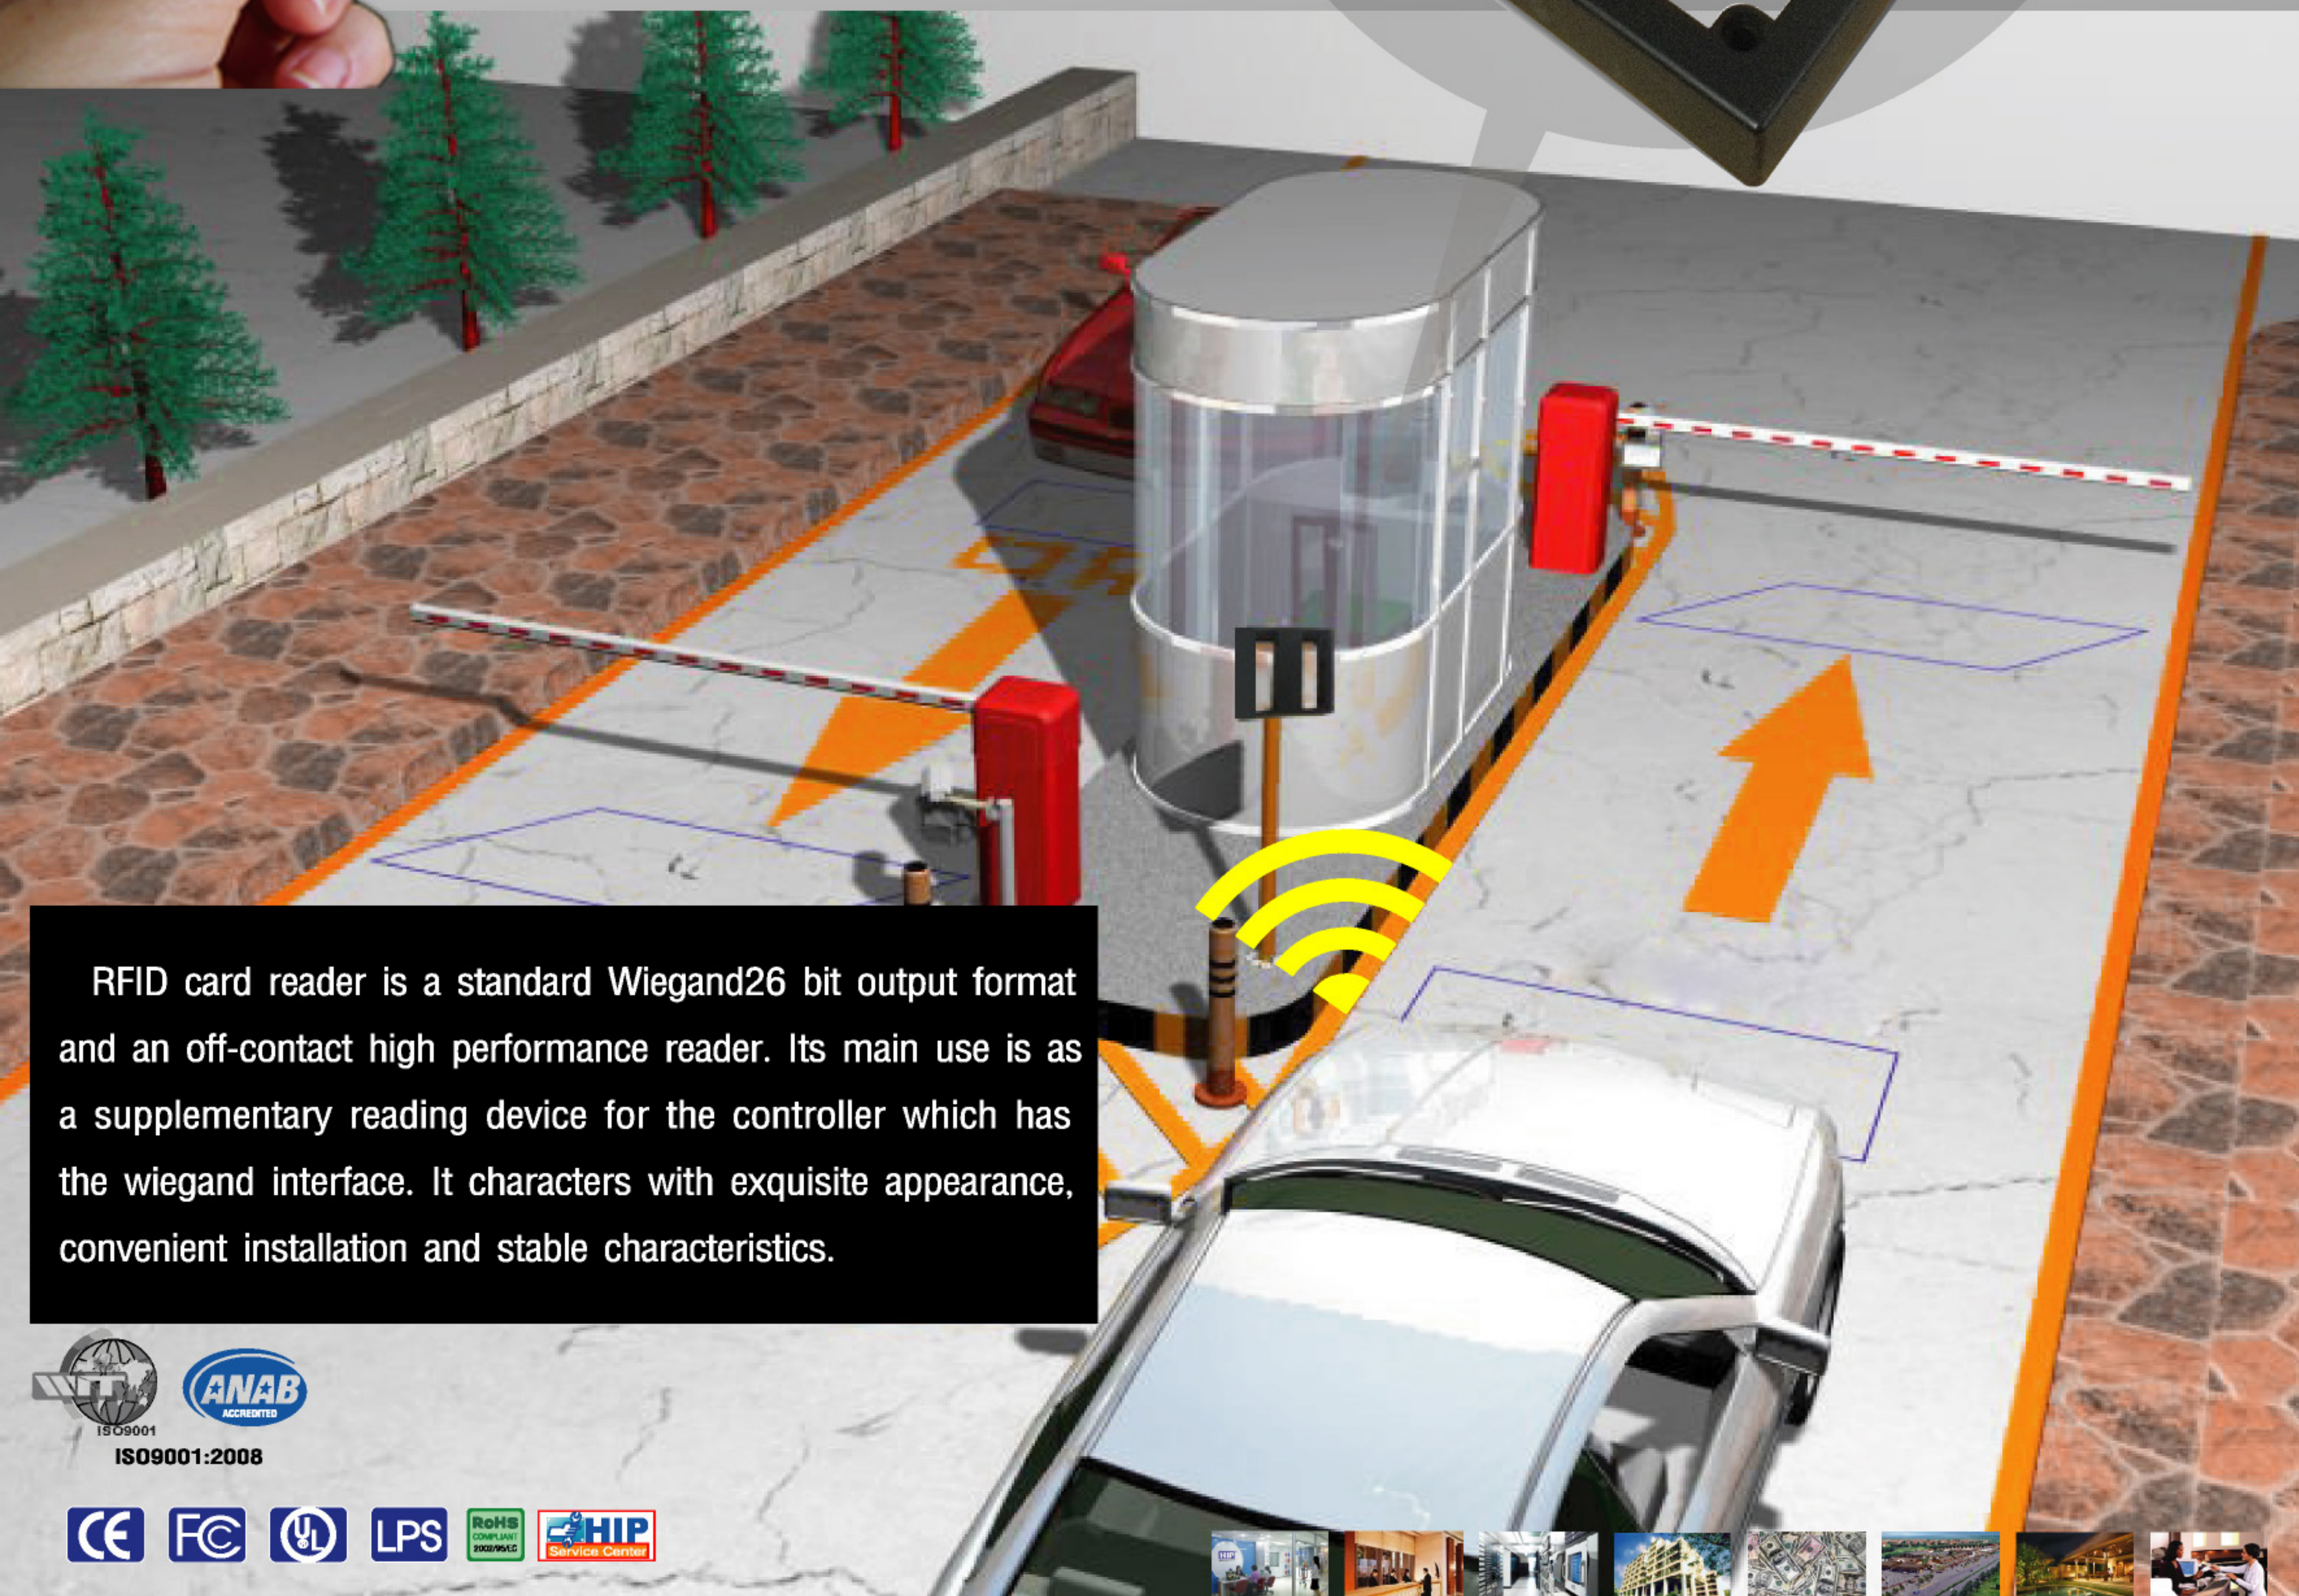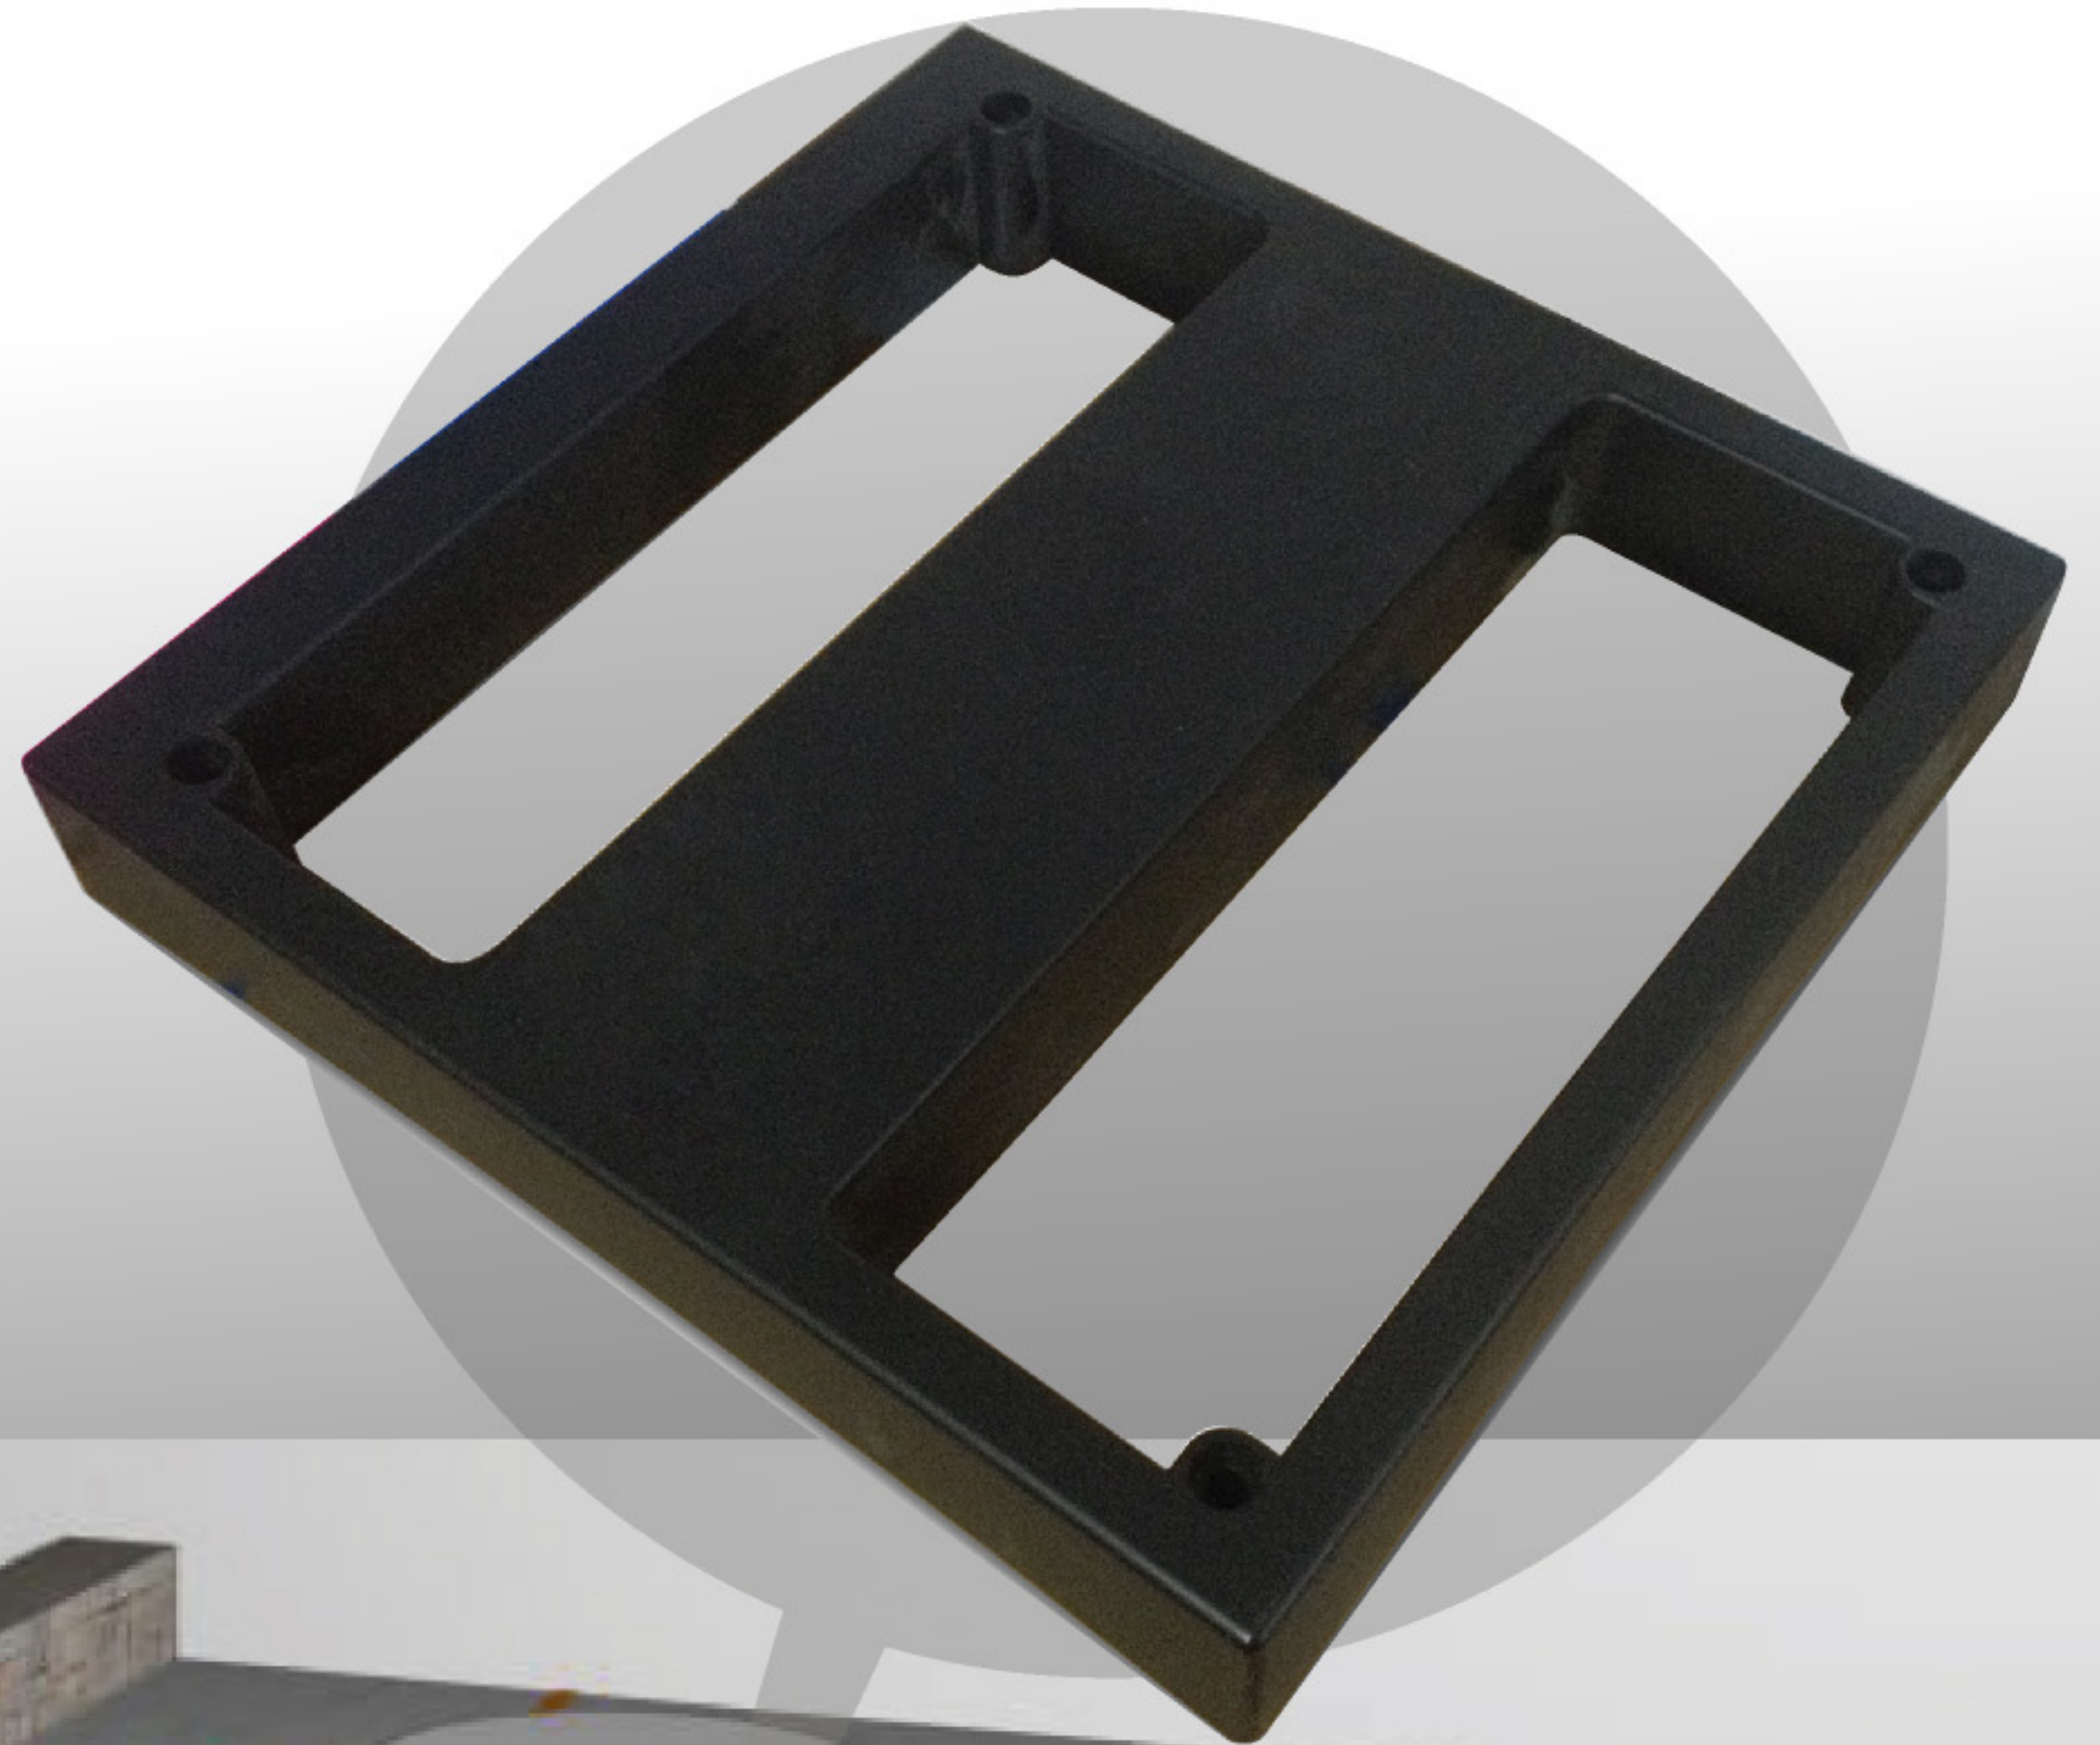

RFID card reader is a standard Wiegand26 bit output format and an off-contact high performance reader. Its main use is as a supplementary reading device for the controller which has the wiegand interface. It characters with exquisite appearance, convenient installation and stable characteristics.




หมายเหตุ ขอสงวนสิทธิ์ในการเปลี่ยนแปลงรายละเอียดทั้งหมดโดยไม่ต้องแจ้งให้ทราบล่วงหน้า

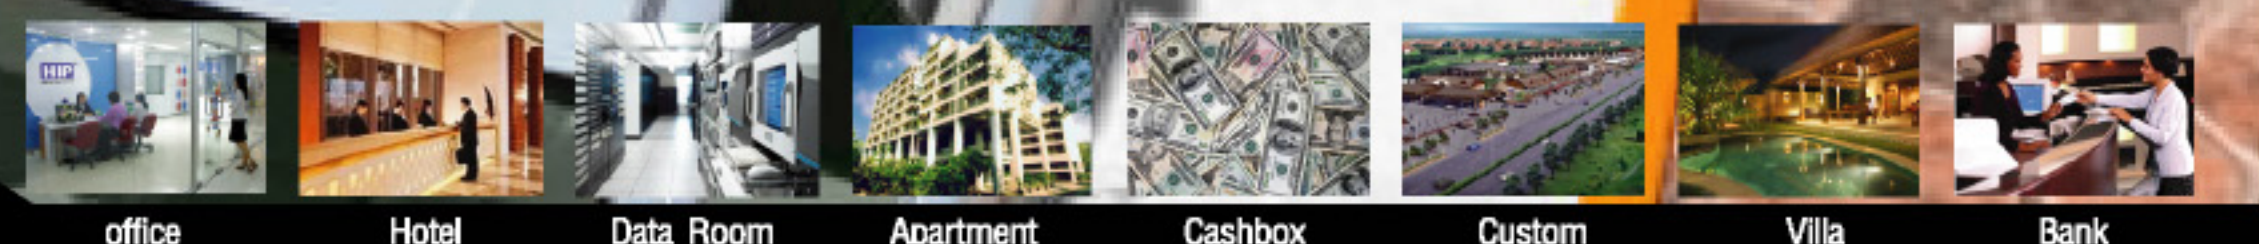



**THE BEST
SECURITY SOLUTION**

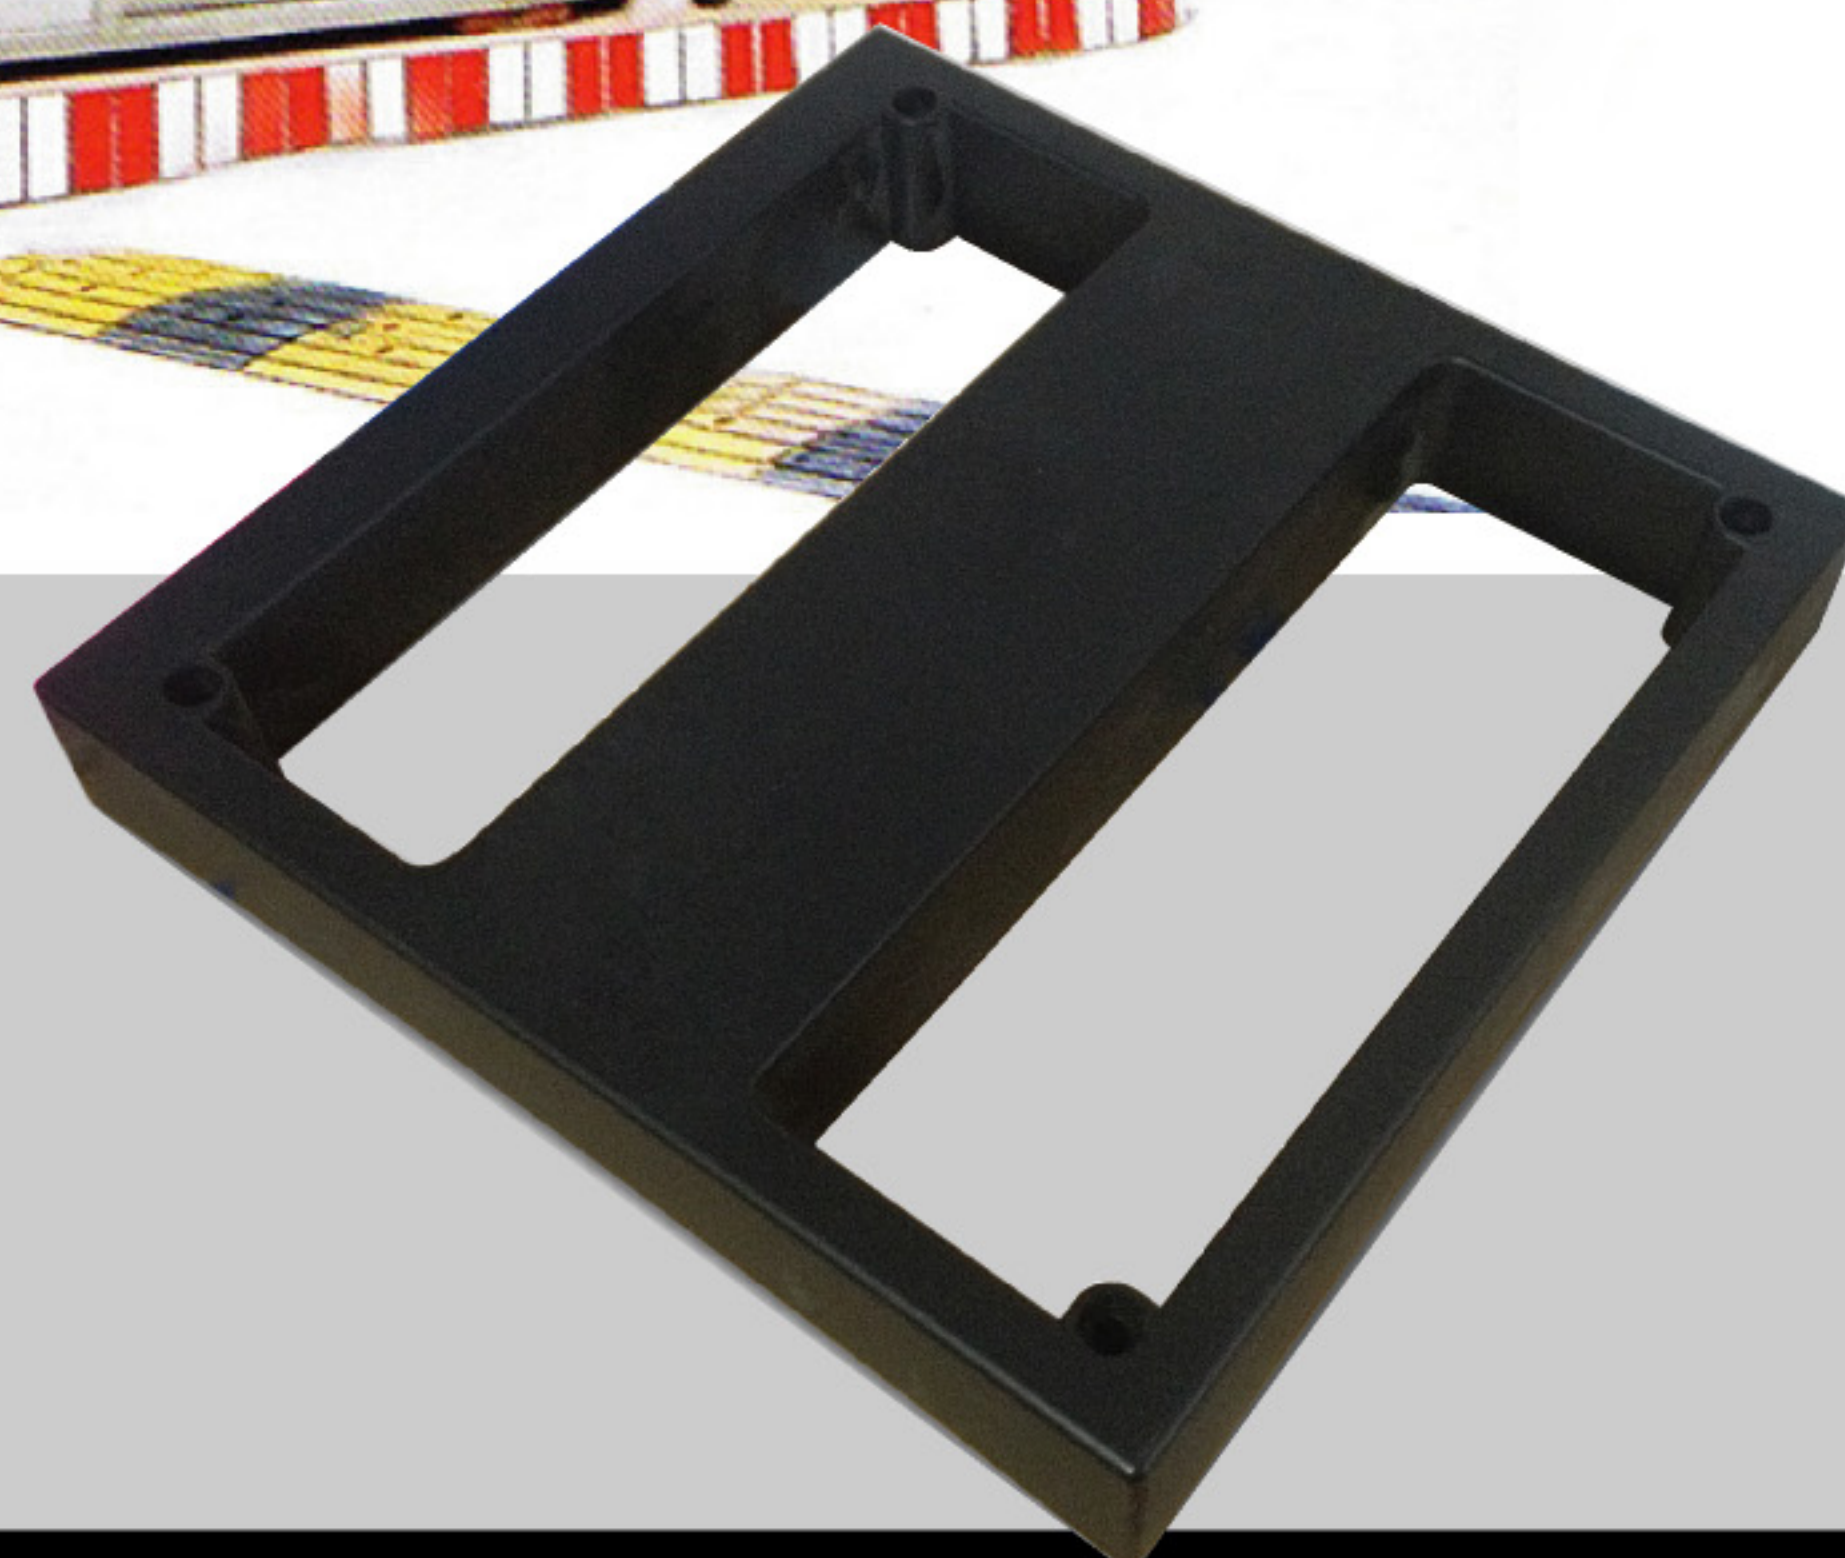

TECHNICAL SPECIFICATION

Communications	Wiegand 26
Output Interface	Standard wiegand26/34bits/ ABA/RS232/RS485
Operating Frequency	125KHz
Reader Card	EM Card
Proximity Range	50~80cm (LONGER ID card 1.8 mm)
Power Supply	DC9~12V
Static Power Supply	2A.
Temperature	-25 °C to 75 °C
Relative Humidity	10%-90%
Recognition Speed	<=0.2s
Color	Black
Material	PVC Case Material (Black Resin for Water-Proof Function)
Dimension	235*240*35 (mm)

Features

- 1) Supports EM technology, 125kHz
- 3) Comprehensive interface
- 4) Build-in antenna
- 5) Permanent reading and sending of ID number
- 6) Electronic potted, weather proof
- 7) Robust casing for harsh environment
- 8) Beeper indication
- 9) Pigtail for easy installation
- 10) Application: car parking, person / item tracking



ISO9001:2008

